150mm Quad Booster - High Pressure
Bottom Outlet Roll Groove - Storz/B.I.C.

Dobbie Boosters are certified to AS2419.3: 2012

Product Code: B150QSTZRGB21
B150QBICRGB21
Class 21

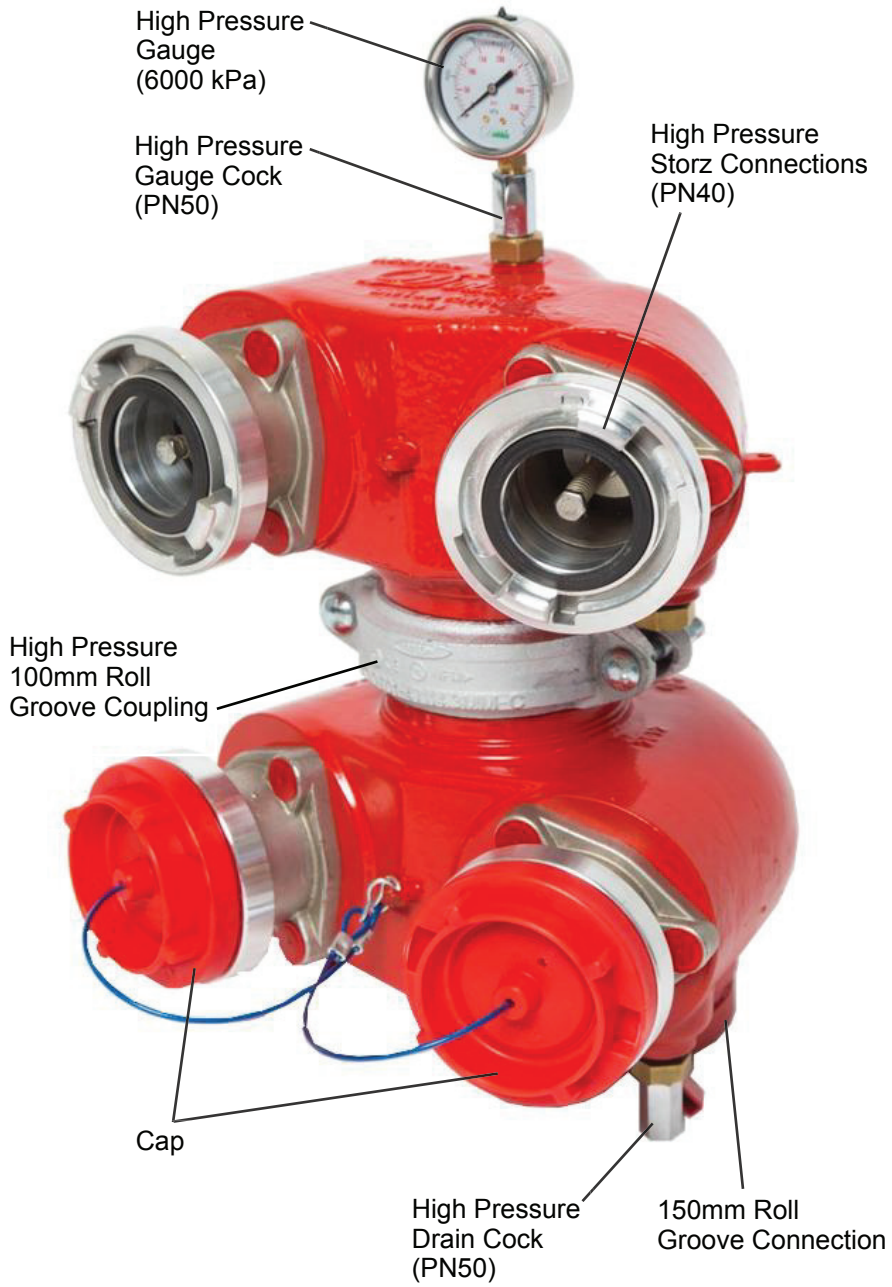

Available Fire Brigade Connections

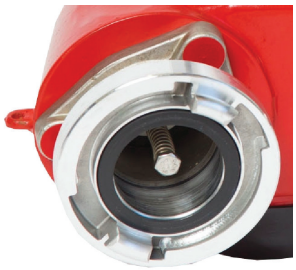

Storz

B.I.C.

Operating Pressure: 2100kPa

Dobbie fire boosters, manufactured right here in Australia, are accredited to AS2419.3:2012. In fact, Dobbie was the first company to have a booster approved under the 2012 Standard. The new style Dobbie fire booster was designed by Dobbie's team of fire specialists. With over 50 years combined expertise between them they developed the booster from concept through to production.

The result is a booster that not only conforms to the current Australian Standard but is also easy to install, efficient in the field and extremely cost competitive against the plethora of imported product. Our ongoing QA commitment demands fire boosters are individually tested ensuring a quality product with problem free performance. Dobbie Class 21 boosters are specifically designed to be capable of operating at pressures up to and including 2100kPa. This makes them suitable for most high-rise commercial/residential buildings.

Dobbie Class 21 fire boosters come standard fitted with either high pressure, precision German forged Storz adaptors or high pressure, stainless steel B.I.C. connections. Additionally, boosters are fitted with a high pressure 100mm roll groove coupling. Boosters are available in either bottom or rear outlet configurations.

www.dobbie.com.au
Fire: Booster - Quad Bottom Outlet - Storz/B.I.C. - Class 21

150mm Quad Booster - High Pressure
Bottom Outlet Roll Groove - Storz/B.I.C.

Dimensions & Installation Details

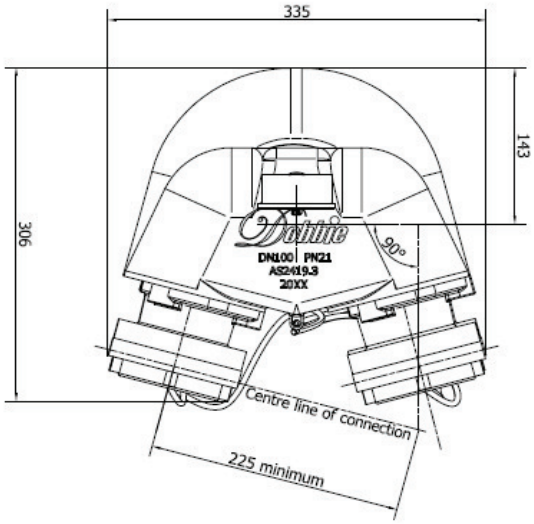

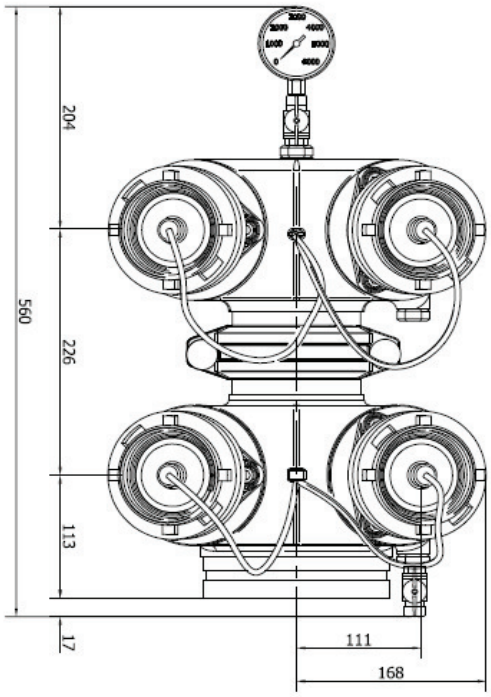

Installation

Height to centre of fire brigade connections to be between 750-1200mm above Finished Ground Level.
Minimum clearance of 225mm from the centre of fire brigade connections to other obstructions.
See AS2419.1 for further installation details.

Product Codes

Quad Booster - H/P Bottom Outlet
Storz: B150QSTZRGB21
B.I.C.: B150QBICRGB21

Materials

Body: Ductile Iron (FBE Coated)
Check Assembly: Stainless Steel
Fire Brigade Connection: Storz - Forged Aluminium H/P
B.I.C - Stainless Steel H/P
Blank / Dust Cap: Storz - PP Red
B.I.C. - TPV Red
Pressure Gauge: AS 1349 - 65mm Stainless Steel (GF) H/P
Drain / Gauge Cock: Italian made - N/P Brass H/P
Roll Groove Coupling: HDG - UL/FM Approved H/P

Certified Product™
Australian Standard
AS2419.3: 2012
Lic SMK 40079

Dobbie
430 Victoria Road, Malaga. WA 6090
T: 08 9249 7000 F: 08 9249 7700

Fire / Civil Sales e: marks@dobbie.com.au
Civil / Fire Sales e: allanr@dobbie.com.au
Civil / Fire Sales Manager e: deanc@dobbie.com.au